

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

PCT/SE 0 3 / 0 1 5 4 4 #2

REC'D 20 OCT 2003

WIPO

PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.




(71) Sökande NordNav Technologies AB, Luleå SE
Applicant (s)

(21) Patentansökningsnummer 0203047-6
Patent application number

(86) Ingivningsdatum 2002-10-15
Date of filing

Stockholm, 2003-10-08

För Patent- och registreringsverket
For the Patent- and Registration Office


Gunilla Lärsson

Avgift
Fee

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

jw/

Ref.: 55600 SE

Applicant: NordNav Technologies AB**Spread Spectrum Signal Processing****5 THE BACKGROUND OF THE INVENTION AND PRIOR ART**

The present invention relates generally to processing of spread spectrum signals by means of vector based algorithms. More particularly the invention relates to a method of receiving spread spectrum signals according to the preamble of claim 1 and a signal receiver according to the preamble of claim 28. The invention also relates to a computer program according to claim 26 and a computer readable medium according to claim 27.

Spread spectrum technology is becoming increasingly important in many areas, of which cellular communication systems and global navigation satellite systems (GNSS) represent two important examples. Moreover, the large variety of transmission standards creates a demand for hybrid- or general-purpose receivers. For instance, both the cellular standards cdma2000 and WCDMA involve transmission of spread spectrum signals. However, due to differences in the air interfaces one and the same terminal cannot be used in the two systems. Instead, a dedicated terminal must be employed in each system. Alternatively, a dual mode terminal must be designed, which includes two separate transceiver chains. Correspondingly, a navigation receiver adapted for one GNSS, say the Global Positioning System (GPS; U.S. Government), is not able to receive signals from a satellite that belongs to a different GNSS, such as the Galileo system (the European programme for global navigation services) or the Global Orbiting Navigation Satellite System (GLONASS; Russian Federation Ministry of Defense).

In order to make this possible, a multi-mode receiver must be designed. However, including multiple receiver chains in a single device is not only expensive, it also renders the unit bulky and heavy, particularly if more than two signal formats are to be processed. Therefore, a programmable software receiver solution is desired whose signal processing principles may be altered according to which signals that shall be received and processed.

Various software solutions are already known for processing GNSS signals. The patent document WO02/50561 is one example in which a GPS receiver tracking system for guiding missiles is described. The receiving station here includes one or more processing stages for receiving and processing GPS data. A control signal controls whether a quantity of processing stages should be increased or decreased in response to the result of a correlation operation. The tracking and recovery of timing information is entirely performed in software. However, the processing involves real-time calculation of relatively complex Fourier transforms, and therefore requires considerable processing resources. Thus, a receiver of this type is not particularly suitable for small sized units, such cellular phones or portable GNSS-receivers.

The article "TUPM 12.4: Software Solution of GPS Baseband Processing", ULSI Laboratory, Mitsubishi Electric Corporation, IEEE, 1998 by Asai T., et al. outlines the principles for a software GPS receiver using an embedded microprocessor, which enables signals from up to eight satellites to be demodulated at around 40 MIPS (millions of / or Mega Instructions Per Second). A 2 MHz GPS baseband signal is here fed to the software radio receiver, which performs spectrum despread and mixing; synchronous demodulation, satellite acquisition and tracking; as well as phase compensation. An algorithm is proposed through which the intermediate frequency (IF) signal is 1-bit sampled and where downconversion is performed before despread. Resulting data in the form of 32 samples are continuously

- processed in parallel. A DRAM (Dynamic Random Access Memory) stores a particular C/A (Coarse Acquisition) code table for each satellite from which signals are received. All other data and instructions are stored in a cache memory in order to accomplish a high-speed processing. Although this strategy is declared to result in a reasonably efficient implementation, the document lacks a specific description as to how the despreading and the correlation should be effected in order to, in fact, obtain this effect.
- 10 Akos. D. et al., "Tuning In to GPS – Real-Time Software Radio Architectures for GPS Receivers", GPS World, July 2001 describes a receiver architecture through which IF signal samples are fed directly from a radio front-end to a program-
15 mable processor for continued processing. The article mentions the possibility of using single instruction multiple data (SIMD) instructions to process multiple data samples in parallel. However, portability- and flexibility problems are recognized, and again, there is no teaching as to how an efficient parallel processing could actually be accomplished.
- 20 Dosis, F. et al., "Design and Test-Bed Implementation of a Reconfigurable Receiver for Navigation Applications", Electronics Department, Politecnico di Torino, Navigation Signal Analysis and Simulation Group, Spring of 2002 relates to the design of a reconfigurable GNSS receiver which is capable of fusing
25 data from two or more different GNSS:s. The document sketches an architecture which, in addition to a radio front-end, includes a Field Programmable Gate Array (FPGA) and a Digital Signal Processor (DSP). The authors address various computational load issues. However, they do not present an algorithm which
30 fulfills the identified requirements.

Hence, the prior art includes a number of examples of software-based GNSS-receivers. Nevertheless, there is yet no distinct teaching of a highly efficient solution which is suitable for implementation in software and has capabilities that are at least in par

with those of today's ASIC-based solutions for receiving and processing spread spectrum signals in real-time (ASIC = Application Specific Integrated Circuit).

SUMMARY OF THE INVENTION

- 5 The object of the present invention is therefore to provide a solution for receiving and processing spread spectrum signals, which solves the problems above and thus to present a truly software adapted strategy that may be implemented in a physically small and power efficient device.
- 10 According to one aspect of the invention the object is achieved by a method of receiving spread spectrum signals as initially described, which is characterized by comprising a preparation for the correlation step, wherein the preparation takes place before the receiving the continuous signal. This preparation
- 15 involves pre-generating a multitude of code vectors, which each represents a particular code sequence of the at least one signal source specific code sequence. Moreover, according to the invention, the correlation step involves multiplying at least each vector in a sub-group of the code vectors with at least one
- 20 vector, which is derived from the data word.

- This strategy is advantageous because the proposed vector approach makes it possible for a digital processor (e.g. a micro-processor) to process multiple signal samples in parallel during each clock cycle and thus make very efficient use of the
- 25 processor. Furthermore, by pre-generating the code vectors valuable processing capacity is saved, which in turn renders it possible to deal with a sufficient amount of input data per time unit in order to, for example track navigation signals that are transmitted by the satellites in a navigation satellite system.
- 30 According to a preferred embodiment of this aspect of the invention, each code vector represents a particular signal source specific code sequence, which is sampled at the basic

sampling rate and quantised with the quantising process that is used to produce the level-discrete sample values. Preferably, the code vectors are also further adapted to the format of the incoming data signal in a way which renders the following processing efficient.

According to another preferred embodiment of this aspect of the invention, the at least one signal source specific code sequence represents so-called pseudo random noise. This type of code sequences is beneficial in environments where two or more different signals are modulated onto the same carrier frequency. Namely, the different pseudo random noise signals are orthogonal (or at least almost orthogonal) to each other. Consequently, a first information signal spread by means of a first pseudo random noise signal causes a minimal deterioration of a second information signal which is spread by means of a second pseudo random noise signal, and vice versa.

According to another preferred embodiment of this aspect of the invention, the receiving step involves down conversion of an incoming high-frequency signal to an intermediate frequency signal. The high-frequency signal is presumed to have a spectrum which is symmetric around a first frequency and the intermediate frequency signal is presumed to have a spectrum which is symmetric around a second frequency, which is considerably lower than the first frequency. Hence, the receiving step transforms the information carrying signal to a baseband which is technically more easy to handle than the band at which the original incoming signal is located.

According to another preferred embodiment of this aspect of the invention, the method includes the following steps. First, a maximum frequency variation of the second frequency due to Doppler-effects is determined. Then, a Doppler frequency interval around the second frequency is defined. The Doppler frequency interval has a lowest frequency limit equal to the difference between the second frequency and the maximum frequency

variation, and a highest frequency limit equal to the sum of the second frequency and the maximum frequency variation. After that, the Doppler frequency interval is divided into an integer number of equidistant frequency steps, and subsequently a frequency candidate vector is defined for each frequency step. This way of dividing the spectrum is advantageous because it provides a flexible modeling of the intermediate carrier frequency and its variations.

According to another preferred embodiment of this aspect of the invention, an integer number of initial phase positions is determined for the intermediate frequency signal. The integer number thus represents a phase resolution, such that a relatively high number corresponds to a comparatively high phase resolution, whereas a relatively low number corresponds to a comparatively low phase resolution. Furthermore, a carrier frequency-phase candidate vector is defined for each combination of carrier frequency candidate vector and initial phase position. The different frequency-phase candidate vectors are beneficial, since they allow the determination of a very accurate estimate of frequency- and phase characteristics of a received signal, which in turn vouches for a demodulated signal having a high quality.

According to yet another preferred embodiment of this aspect of the invention, the number of elements in each carrier frequency-phase candidate vector is determined. Subsequently, the carrier frequency-phase candidate vectors are stored according to a data format, which is adapted to performing correlation operations between the at least one vector derived from the data word and a segment of a carrier frequency-phase candidate vector. This adaptation is advantageous because thereby several signal samples may be processed in parallel by means of comparatively simple operators. Preferably, the adapting of the data format involves adding at least one element to each segment of the carrier frequency-phase candidate vector, such that the segment attains a number of elements which is equal to

the number of elements in each of the at least one vector that is derived from the data word. Hence, it is namely possible to process a segment of the carrier frequency-phase candidate vector together with one of the at least one vector by either a
5 so-called Single Instruction Multiple Data (SIMD)-operation or a logical XOR-operation.

According to still another preferred embodiment of this aspect of the invention, the method also includes the following steps. First, a maximum variation of the code rate due to Doppler-effects is determined. Then, a Doppler rate interval is defined
10 around a center code rate. The Doppler frequency interval has a lowest code rate limit equal to the difference between the center code rate and the maximum code rate variation, and a highest frequency limit equal to the sum of the center code rate and the
15 maximum code rate variation. In analogy with the intermediate frequency spectrum, the Doppler rate interval is divided into an integer number of equidistant code rate steps, and a code rate candidate is defined for each code rate step. In further analogy with the intermediate frequency, an integer number of possible
20 initial code phase positions is determined for each code rate candidate. The integer number thus represents a code phase resolution, such that a relatively high number corresponds to a comparatively high code phase resolution, whereas a relatively low number corresponds to a comparatively low code phase
25 resolution. Typically, the spread spectrum code modulation is less sensitive to distortion caused by Doppler effects than the frequency modulation. Therefore, the code rate steps may be relatively large. However, a certain degree of Doppler shift estimation is desirable to attain a demodulated signal of high quality.

30 According to yet another preferred embodiment of this aspect of the invention, a set of code vectors is generated for each signal source specific code sequence by sampling each code rate-phase candidate vector with the basic sampling rate, and thus produce a corresponding code vector. Again, this simplifies a
35 parallel processing of several signal samples by means of

comparatively simple operators.

According to still another preferred embodiment of this aspect of the invention, a modified code vector is generated on basis of each code vector by: copying a particular number of elements from the end of an original code vector to the beginning of the modified code vector, and copying the particular number of elements from the beginning of the original code vector to the end of the code vector. This extension of the code vector is highly advantageous because it allows extraction of tracking parameters through early-, prompt- and late techniques by performing a simple translation of local copies of the signal source specific code sequence.

According to still another preferred embodiment of this aspect of the invention, a set of modified code vectors is stored for each signal source specific code sequence. Each modified code vector here contains a number of elements, which represent a sampled version of at least one full code sequence. As mentioned above, the modified code vector also includes a repetition of the beginning and the end of the sequence. A particular modified code vector is defined for each combination of code rate candidate and code phase position. These pre-generated modified code vectors save considerable processing capacity in the processor, since they need not be calculated in real time, but may simply be acquired from a memory.

According to yet another preferred embodiment of this aspect of the invention, the data format of the modified code vectors is adapted with respect to the data format of the at least one vector that has been derived from the data word, such that a modified code vector and one of the at least one vector may be processed jointly by a SIMD-operation or an XOR-operation. Naturally, this is advantageous from a processing efficiency point-of-view.

According to yet another preferred embodiment of this aspect of

the invention, the method involves an initial acquisition phase and a subsequent tracking phase. The acquisition phase establishes a set of preliminary parameters which are required for initiating a decoding of signals that are received during the tracking phase. The parameters may include: a modified code vector, a carrier frequency candidate vector an initial phase position, a code phase position and code index, which denotes a starting sample value for the modified code vector. A successful acquisition phase thus results in that at least one signal source specific code sequence is identified and that this signal is possible to track by the receiver (i.e. may be continued to be received).

According to still another preferred embodiment of this aspect of the invention, the tracking in turn, involves the following steps. First, based the tracking characteristics, a prompt pointer is calculated for each modified code vector. The prompt pointer indicates a start position for the code sequence. The initial prompt pointer value is set equal to the code index. Then, at least one pair of early- and late pointers is assigned around each prompt pointer. The early pointer specifies a sample value which is positioned at least one element before the prompt pointer's position, and correspondingly, the late pointer specifies a sample value being positioned at least one element after the prompt pointer's position. These pointers are used to maintain the tracking of the received signal by a repeated repositioning of the pointers around a correlation maximum value, such that the prompt pointer is positioned as close as possible to this value, the early pointer is positioned in time somewhat prior to this value and the late pointer is positioned in time somewhat after this value. An important advantage attained by this strategy is that one and the same vector may be re-used in order to represent different delays. Thus, valuable memory space and processing capacity is saved.

According to still another preferred embodiment of this aspect of the invention, the tracking involves the following further steps.

First, a sequence of incoming level-discrete sample values is received. Then, data words are formed from the sample values, such that each data word contains a number of elements which is equal to the number of elements in each carrier frequency-phase candidate vector. After that, a relevant set of carrier frequency-phase candidate vectors is calculated for the data word, and a pre-generated in-phase representation respective a quadrature-phase representation of the vector is acquired for each carrier frequency-phase candidate vector in the relevant set. Subsequently, each data word is on one hand multiplied with a in-phase representation of the carrier frequency-phase candidate vector in the relevant set to produce a first intermediate-frequency-reduced information word, and on the other hand multiplied with a quadrature-phase representation of the carrier frequency-phase candidate vector in the relevant set to produce a second intermediate-frequency-reduced information word. The intermediate-frequency-reduced information words thus constitute a respective component of the vectors mentioned above that have been derived from the incoming data words. This multiplied strategy is advantageous because it enables a very efficient usage of the capacity of a general-purpose microprocessor.

According to yet another preferred embodiment of this aspect of the invention, XOR- or SIMD-operations are used to perform the multiplication between the data word and the in-phase representation of the carrier frequency-phase candidate vector respective between the data word and the a quadrature-phase representation of the carrier frequency-phase candidate vector.

According to another preferred embodiment of this aspect of the invention, the tracking involves the further steps of: correlating the first intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the prompt pointer to produce a first prompt-despread symbol string, correlating the first intermediate-frequency-reduced information word with a modified code vector starting at a position indicated

by the early pointer to produce a first early-despread symbol string, correlating the first intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the late pointer to produce a first late-despread symbol string, correlating the second intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the prompt pointer to produce a second prompt-despread symbol string, correlating the second intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the early pointer to produce a second early-despread symbol string, and correlating the second intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the late pointer to produce a second late-despread symbol string. Preferably, a resulting data word is then derived for each set of the despread symbol strings. This may, for example be performed either by performing the relevant adding operation, or by looking up a pre-generated value in a table based on the bit pattern of the despread symbol strings depending on whether the resulting data words contain packed or unpacked information. Data of high quality may thus be obtained with a minimum of real time calculations, which is advantageous from a processing point-of-view.

According to yet another preferred embodiment of this aspect of the invention, either XOR- or SIMD-operations are used also to perform the multiplication between the intermediate-frequency-reduced information words and the modified code vectors, since again, this is advantageous from a processing point-of-view.

According to another preferred embodiment of this aspect of the invention, certain pieces of information are propagated in connection with completing the processing of a current data word and initiating the processing of a subsequent data word. Preferably, this propagated information includes: a pointer which indicates a first sample value of the following data word, a group of parameters that describe the relevant set of carrier

frequency-phase candidate vectors, the relevant set of code vectors, and the prompt-, early-, and late pointers. Hence, based on the propagated information, the subsequent data word may be processed immediately.

5 According to a further aspect of the invention the object is achieved by a computer program directly loadable into the internal memory of a computer, comprising software for performing the above proposed method when said program is run on a computer.

10 According to another aspect of the invention the object is achieved by a computer readable medium, having a program recorded thereon, where the program is to make a computer perform the above proposed method.

15 According to another aspect of the invention the object is achieved by the signal receiver as initially described, which is characterized in that the proposed computer program is loaded into the memory means, such that the receiver will operate according to the above-described method.

20 Consequently, the invention offers an excellent instrument for receiving and decoding any type of spread spectrum signals in a general software radio receiver. For instance, one and the same receiver may be used to track navigation satellite signals of different formats. These signals may even be received in parallel, such that a first signal is received on a first format
25 while one or more other signals are received on a second or third format.

Moreover, the proposed solution permits one and the same receiver to be utilized for completely different purposes, such as communication in a cellular system.

30 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is now to be explained more closely by

means of preferred embodiments, which are disclosed as examples, and with reference to the attached drawings.

5 Figure 1 shows a spectrum graph over an exemplary spread spectrum signal from which information may be extracted according to the invention,

Figure 2 shows a spectrum graph over a frequency down-converted signal corresponding to the spectrum shown in figure 1,

10 Figure 3 is an enlarged version of figure 2 in which a Doppler shifting of the spectrum is illustrated,

Figure 4 illustrates how a data signal is modulated onto a signal source specific code sequence according to an embodiment of the invention,

15 Figure 5 depicts a three-dimensional graph over carrier frequency-phase candidate vectors to be used as initial correlators according to an embodiment of the invention,

Figure 6 shows an alternative representation the carrier frequency-phase candidate vectors in figure 5,

20 Figures 7-8 show graphs which illustrate how a code index and a code phase are defined for a received signal according to an embodiment of the invention,

25 Figures 9a,b illustrate how a modified code vector is generated based on an original code vector according to an embodiment of the invention,

Figure 10 depicts a three-dimensional graph over code rate-phase candidate vectors to be used as subsequent correlators according to an embodiment of the invention,

30 Figure 11 illustrates how a set of code sequence start pointers is assigned to a modified code vector according to an embodiment of the invention,

- Figure 12 illustrates how data words are formed from a sequence of incoming level-discrete sample values according to an embodiment of the invention,
- 5 Figure 13 illustrates how the data words of figure 12 are correlated with various pre-generated vectors according to an embodiment of the invention,
- Figure 14 illustrates how multiple pairs of pointers may be assigned according to an embodiment of the invention,
- 10 Figure 15 shows a proposed signal receiver, and
- Figure 16 illustrates, by means of a flow diagram, the general method of processing spread spectrum signals according to the invention.

15 DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

In order to realize a truly software based signal processing solution in real-time at high sampling rates, such as those required in a GNSS, the architecture of the microprocessor system must be utilized very efficiently. The present invention
20 uses an approach, which involves a form of parallel processing based on pre-generated code vector representations. The invention thereby strikes a balance between processing speed and memory usage, which compensates for the capacity deficit of a general purpose microprocessor in relation to an ASIC. The
25 details of this solution will become apparent from the below disclosure.

Figure 1 shows a spectrum graph over an exemplary spread spectrum signal from which information may be extracted according to the invention. For example, the signal may be a
30 GPS C/A-signal in the L1-band with a carrier frequency f_{HF} of 1,57542 GHz. This means that the signal's spectrum is

symmetrical around the carrier frequency f_{HF} . Moreover, the signal has at least 98% of its energy distributed within a 2 MHz wide frequency band BW_{HF} around the carrier frequency f_{HF} . Therefore, it is generally sufficient if the spread spectrum signal
5 is downconverted to an intermediate frequency f_{IF} at around 1 MHz in order to enable further signal processing at a lower frequency.

Figure 2 shows a spectrum graph over such a frequency down-converted signal, whose spectrum is symmetrical around an
10 intermediate frequency f_{IF} , which is considerably lower than the carrier frequency f_{HF} , for example $f_{IF} = 1,25$ MHz. Due to movements of the transmitter (i.e. typically a satellite in orbit) and the receiver (i.e. typically a mobile GNSS-receiver) a Doppler shift may occur in the received signal, which is proportional to the
15 relative velocity between the transmitter and the receiver. A maximum Doppler shift f_D is defined which in the GNSS case normally is approximately 10 kHz. Thus, the entire spectrum may be shifted within an interval $2f_D$, such that the center frequency falls any where between $f_{IF}+f_D$ (corresponding to a
20 maximum positive Doppler shift) and $f_{IF}-f_D$ (corresponding to a maximum negative Doppler shift). For illustrative purposes the interval $2f_D$, has been severely exaggerated in the figure 2. The figure also indicates a phase variation interval ϕ_D (along an independent axis ϕ) around the intermediate frequency f_{IF} . The
25 phase variation interval ϕ_D demonstrates the fact that the phase position of the received signal is initially unknown to the receiver, and thus constitutes a calibration parameter. The effects of this parameter will be further elucidated below with reference to figure 5.

30 An enlarged version of the spectrum in figure 2 is shown in figure 3. The intermediate spectrum may, due to possible Doppler effects, be shifted such that its center frequency lies in the interval $2f_D$ from $f_{IF-min}=f_{IF}-f_D$ to $f_{IF-max}=f_{IF}+f_D$. The potential maximum shifted spectra are here indicated with a respective
35 dashed line. The diagram in figure 3 also shows a Nyquist

frequency $r_s/2$ corresponding to a minimal sampling rate r_s which, when used for sampling the intermediate frequency signal, will result in a non-aliased discrete spectrum. Provided that $f_D = 10$ kHz, $f_{IF} = 1,25$ MHz, $BW_{HF} = 2$ MHz and the intermediate frequency signal is lowpass filtered through an analog filter having a 2,5 MHz wide passband, the minimal sampling rate r_s becomes 5 MHz (i.e. two times the highest frequency component after the analog filter).

Figure 4 illustrates schematically how a data signal D is modulated onto a signal source specific code sequence CS on the transmitter side according to an embodiment of the invention. According to a preferred embodiment of the invention, the signal source specific code sequence CS constitutes so-called pseudo random noise. The data signal D here contains a data symbol sequence $[+1, -1, -1, +1, -1]$, and has a relatively low symbol rate, say 50 Hz. The signal source specific code sequence CS, however, has a relatively high symbol rate (or more correctly chipping rate). For instance, a signal source specific code sequence CS in the form of a GPS C/A code may have a chipping rate of 1,023 MHz and contain 1023 chips per period. Each chip, ch, is either +1 or -1. Hence, the C/A code repeats itself one per ms. The data signal D is modulated onto (or spread by) the signal source specific code sequence CS by multiplying each data symbol with the code sequence CS. The data symbol +1 thereby results in an unaltered code sequence CS, whereas the data symbol -1 results in an inverted code sequence CS.

If a data signal D having a rate of 50 Hz is spread by means of a signal source specific code sequence CS having a chipping rate of 1,023 MHz, this results in 20 entire code sequences CS per data symbol. Namely, the period time for one data symbol is 20 ms, whereas the period time for the code sequence is only 1 ms.

Figure 5 depicts a three-dimensional graph over different carrier frequency-phase candidate vectors, which may be used as initial

correlators according to an embodiment of the invention. As mentioned above, the intermediate frequency spectrum may be Doppler shifted. Therefore, the particular frequency of the received signal is initially unknown within a Doppler frequency interval from f_{IF-min} to f_{IF-max} . Moreover, the phase position of the received signal is beforehand unknown to the receiver. In order to enable an estimation of the actual intermediate carrier frequency, the Doppler frequency interval $f_{IF-min} - f_{IF-max}$ is divided into an integer number of equidistant frequency steps. Of course, the larger the number of steps is, the more accurately the intermediate carrier frequency may be estimated. In this example, a step size Δf of 20 Hz is chosen. In some applications, however, a much larger step size Δf may provide a sufficient frequency accuracy, whereas in other applications (where relatively high accuracy is needed) a considerably smaller step size Δf may be required. In any case, a Doppler frequency interval $f_{IF-min} - f_{IF-max}$ of 20 kHz and a step size Δf of 20 Hz requires 1000 steps, where a first step includes the frequencies from f_{IF-min} to $f_{IF-min} + \Delta f$, a second step includes the frequencies from $f_{IF-min} + \Delta f$ to $f_{IF-min} + 2\Delta f$, and so on up to a last step including the frequencies from $f_{IF-min} + 999\Delta f$ to f_{IF-max} .

A frequency candidate vector f_{IF-C} is defined for each frequency step. In order to estimate an initial phase position of the intermediate carrier frequency, an integer number of initial phase positions Φ_0, \dots, Φ_7 are determined. The illustrated example shows eight such positions Φ_C . This gives a phase resolution of $\pi/4$. For each frequency candidate vector f_{IF-C} , eight different phase positions Φ_0, \dots, Φ_7 are thus defined which each represents a particular phase shift from 0 to $7\pi/4$. A combination of a certain carrier frequency candidate vector f_{IF-C} and a particular initial phase position Φ_C is referred to as a carrier frequency-phase candidate vector. Figure 5 shows all such vectors (i.e. eight) for the first step, where $f_{IF-C} = f_{IF-min}$, and the second step, where $f_{IF-C} = f_{IF-min} + \Delta f$.

Additionally, figure 5 includes an axis L_C along which the

number of sample values (or length) of the frequency candidate vector f_{IF-C} is indicated. The L_C number is preferably a power of 2 because this generally renders the implementation more simple. The number of sample values in each frequency candidate vector f_{IF-C} is set in consideration of the available memory space, the desired frequency resolution and the desired phase resolution. If, in the example above, a length of 512 samples is chosen and each sample requires one byte, the total (uncompressed) memory demand would be 3,9 MB (i.e. 1000 frequencies \times 8 phase positions \times 512 B = 4096000 B = 3,9 MB).

Figure 6 shows an alternative representation the carrier frequency-phase candidate vectors $V_{f\phi}(f_{IF-C}, \phi_C)$ in figure 5. Here, the vectors $V_{f\phi}(f_{IF-C}, \phi_C)$ range from the carrier frequency $f_{IF-C}=f_{IF-min}$ (say 1,24 MHz) to $f_{IF-C}=f_{IF-max}$ (say 1,26 MHz), from the phase shift position $\phi_C=\phi_0$ (say 0) to $\phi_C=\phi_7$ (say $7\pi/4$), all have a length L_C of s_n samples (say 512) and are represented in a cube. Hence, a particular frequency-phase candidate vector $V_{f\phi}(f_{IF-C}, \phi_C)$ is given by a cuboid segment in the cube which is parallel with the L_C -axis, and ranges from $L_C=s_1$ to $L_C=s_n$.

After having generated all the carrier frequency-phase candidate vectors $V_{f\phi}(f_{IF-C}, \phi_C)$, the vectors are stored in a digital memory with a comparatively short access time, such that they may be readily accessed during a later acquisition and/or tracking phase. Preferably, the carrier frequency-phase candidate vectors $V_{f\phi}(f_{IF-C}, \phi_C)$ are stored according to a data format which is adapted to performing correlation operations between a vector that has been derived from incoming data words (representing one or more received signals) and a segment of a carrier frequency-phase candidate vector $V_{f\phi}(f_{IF-C}, \phi_C)$. The vectors may either include packed samples or they may contain samples that are unpacked to a smallest manageable unit in the micro-processor, such as a byte. Further details regarding the data format issues will be discussed below.

Figure 7 shows a graph over an exemplary code sequence CS,

which has been received, downconverted and sampled according to an embodiment of the invention. After subsequent removal of the intermediate frequency component, the code sequence CS either attains the signal value +1 or -1, and the symbols are altered at a chipping rate of for example 1,023 MHz. At the receiver side, the code sequence CS is sampled with a sampling rate r_s of for example 5 MHz. The sampling instances are indicated by means of dots on the code sequence signal CS along an axis s_1 . As is apparent from the figure there are approximately four sample values per chip period. Hence, the requirements of the Nyquist theorem are clearly fulfilled. However, the samples are not capable of determining the transition instances with a sufficient accuracy, i.e. where the code sequence signal CS changes from representing one chip symbol to representing another one chip symbol. Therefore, a so-called code phase must be determined. Moreover, a particular sample value at which the code sequence starts must also be established.

Figure 8 shows a graph, which illustrates the sample value at which the code sequence CS starts (the so-called code index CI) and how a code phase, Cph, is defined in relation to this sample value. An initial segment of the code sequence signal CS in figure 7 is therefore represented in figure 8.

A first sample instance is here presumed to occur shortly prior to the actual start of the code sequence CS signal period. Hence, a corresponding sample value s_1 belongs to the end of the preceding period. This is illustrated by means of the line representing the code sequence signal CS being dashed. A subsequent sample instance, however, overlaps the code sequence CS period. The corresponding sample value s_2 is defined as the code index CI. The actual beginning of a code sequence signal is determined in a preceding acquisition phase and typically involves correlation between the received signal and a local copy of the code sequence CS.

The distance between the start of the code sequence signal CS and the code index CI, in turn, is defined as the code phase Cph, and thus represents a measure of the translation (or skew) between the sample instances s_i and the chip transitions. The
5 sampling interval between two consecutive sample instances s_i is divided into an integer number of possible initial code phase positions in order to estimate the code phase Cph. In this example, ten 0.1-steps ranging from 0.0 to 0.9 are defined, where a first step 0.0 would indicate that code sequence signal
10 CS starts at the code index CI, and a last step 0.9 would indicate that code sequence signal CS starts almost at the preceding sample value s_i . The figure 8 shows a code phase Cph of 0.4, i.e. a situation where the code sequence signal CS starts approximately in the middle between two consecutive
15 sample instances s_i .

In analogy with the carrier frequency-phase candidate vectors $V_{fp}(f_{IF-C}, \Phi_C)$, code rate-phase candidate vectors may now be defined for each signal source specific code sequence CS and combination of code rate CR, code index CI and code phase
20 Cph. Nevertheless, according to a preferred embodiment of the invention, a modified code vector is first produced based on each original code vector.

Figures 9a and 9b illustrate how this may be performed. A code vector CV in figure 9a contains a number of sample values, say
25 5000. Preferably, the number of sample values is selected in relation to sampling rate such that a full code sequence period is recorded. In the above example, with a sampling rate r_s of 5 MHz, this means that the 5000 samples cover exactly one full code sequence CS period (which has a duration of 1 ms and contains 1023 chips, since the chipping rate is 1,023 MHz).
30

A modified code vector CV_m is now generated on basis of the original code vector CV by copying a particular number of elements E_a (e.g. two) from the end of the original code vector CV to the beginning of the modified code vector CV_m .

Correspondingly, a particular number of elements E_b (e.g. two) from the beginning of the original code vector CV are copied to the end of the code vector CV_m , i.e. after the elements E_a . Figure 9b shows the resulting modified code vector CV_m . Since, in this example, each chip symbol is sampled at approximately four instances, two sample values are equivalent to about one half chip period. Thereby, the above copying of the elements E_a and E_b allows a one-half-chip shifting of the code vector CV during a correlation operation between the code vector CV and the received data. This will be discussed further below with reference to figure 11.

Figure 10 depicts a three-dimensional graph over different code rate-phase candidate vectors $CV_m(CR_{C-C}, Cph)$ which represent a signal source specific code sequence $CS(i)$. Analogous to the intermediate carrier frequency, the nominal code rate CR_C for the code rate candidate vector CR_{C-C} may also vary due to Doppler effects from a lowest value CR_{min} to a highest value CR_{max} . However, since the code rate (or chipping rate) is comparatively high, the rate variation here becomes rather small.

For example, a Doppler shift of 10 kHz at the intermediate carrier frequency is equivalent to a shift in a nominal code rate CR_C at 1,023 MHz of merely 6,5 Hz. Namely, the Doppler shift in respect of the code rate is generally equal to the ratio between the carrier frequency and the code rate ($1575,42 \text{ MHz} / 1,023 \text{ MHz} = 1540$; a Doppler shift of 10 kHz at the intermediate carrier frequency thus corresponds to $10000/1540 \approx 6,5 \text{ Hz}$). The code rate candidate vector CR_{C-C} may attain a value anywhere in a Doppler rate interval between $CR_{min} = 1022993,5 \text{ Hz}$ and $CR_{max} = 102306,5 \text{ Hz}$. The Doppler rate interval $CR_{min} - CR_{max}$ is divided into an integer number of equidistant code rate steps ΔCR , say 13. In this example, each interval CR_{min} , $CR_{min} + \Delta CR$, ..., CR_{max} thus spans 1 Hz. According to a preferred embodiment of the invention, the code rate step size is adaptive, e.g. determined on basis of the sampling frequency and the desired resolution.

In figure 10, the three-dimensional graph (or cube) contains a set of code rate-phase candidate vectors $CV_m(CR_{C-C}, Cph)$, where the code rate ranges from $CR_{C-C}=CR_{min}$ to $CR_{C-C}=CR_{max}$, the code phase ranges from $Cph=0.0$ to $Cph=0.9$, and each vector has a length L_{CVm} of s_m samples (for example 5004). Hence, a particular code rate-phase candidate vector $CV_m(CR_{C-C}, Cph)$ is given by a cuboid segment $CV_m(CR_{min}+2\Delta CR, 0.4)$ which is parallel with the L_{CVm} -axis and ranges from $L_{CVm}=s_1$ to $L_{CVm}=s_m$.

After having generated all the code rate-phase candidate vectors $CV_m(CR_{C-C}, Cph)$, these vectors are stored in a digital memory with a comparatively short access time, such that they may be readily accessed during the acquisition and/or tracking phase. Preferably, the code rate-phase candidate vectors $CV_m(CR_{C-C}, Cph)$ are stored according to a data format which is adapted to correlation operations to be performed between a vector that has been derived from incoming data words and a segment of a the code rate-phase candidate vectors $CV_m(CR_{C-C}, Cph)$. For example, the code rate-phase candidate vectors $CV_m(CR_{C-C}, Cph)$ may include packed samples or they may contain samples that are unpacked to a smallest manageable unit in the microprocessor, such as a byte. Further details regarding these data format issues will be discussed below with reference to figure 13.

During tracking of a spread spectrum signal, i.e. a continued reception of the signal and demodulation of the data contained therein, it is necessary to update relevant tracking parameters for the signal. Normally, the tracking phase is preceded by a so-called acquisition phase during which a set of preliminary parameters are established that are required for initiating the signal decoding. A successful acquisition phase thus results in that at least one signal source specific code sequence is identified and a data signal transmitted by means of this sequence is possible to demodulate. The tracking characteristics that may be associated with a signal source specific code sequence include: a modified code vector CV_m (which defines a

carrier frequency candidate vector f_{IF-C} and an initial phase position Φ_C), a code phase position, C_{ph} , and a code index, CI . In order to maintain an adequate timing of the correlating operations in the receiver, a set of pointers are required which
5 indicate the start position of the code sequence in relation to the modified code vector and are updated repeatedly, preferably between each correlation.

Figure 11 illustrates one such set of pointers that are assigned to a modified code vector CV_m . A prompt pointer P_P indicates a
10 current estimate of the code sequence start position. This pointer P_P is initially set equal to the code index CI . Adequate P_P -pointer positions for any subsequent segments of the received data are obtained by retrieving appropriate modified code vectors CV_m from the digital memory where such pre-generated are stored. Between each segment, the code rate
15 candidate vector CR_{C-C} as well as the initial code phase C_{ph} is updated. Additionally, at least one pair of early- and late pointers P_E and P_L respectively is assigned on each side of the prompt pointer P_P , where the early pointer P_E specifies a sample value being positioned at least one element before the prompt
20 pointer's P_P position, and the late pointer P_L specifies a sample value being positioned at least one element after the prompt pointer's P_P position. Each correlation is then performed with the presumption that the code sequence starts at the P_P -position, at the P_E -position as well as at the P_L -position. If the correlation
25 over the P_P -position results in a higher correlation value than over any of the other positions, and at the same time the P_E - and P_L -pointers are balanced (i.e. the correlation over these positions result in equal values), this is interpreted as an optimal setting of the tracking parameters. Should, however, this not be
30 true the sampled data must be repositioned in relation to the P_P -, P_E - and P_L -pointers, such that the correlation peak again coincides with the P_P -pointer's position. An un-calibrated pointer positioning may thus be detected via a difference between the
35 correlation value over the P_E -pointer position and the correlation

value over the P_L -pointer position, while the correlation over the P_P -position still results in the highest correlation value. In this case, the potentially highest correlation value (corresponding to the optimal P_P -positioning) lies somewhere between the current P_P -position and the current P_E -position or between the current P_P -position and the current P_L -position depending on which of the P_E - and P_L -pointer positions that results in the highest correlation value. A pointer updating normally takes place between each segment. A second or third pair of P_E - and P_L -pointers outside the first pair of pointers further enhances the possibilities of accomplishing an accurate adjustment of the tracking. Depending on the value of the received symbol, an optimal setting P_P -pointer may, in fact, also be equivalent to the correlation over the P_P -position resulting in a lower correlation value than over any of the other pointer positions. Namely, this is true if a negative valued data bit is received. However otherwise, the same principles apply.

In any case, the P_P -, P_E - and P_L -pointers may only be positioned within certain intervals in the modified code vector CV_m . The P_P -pointer may be set anywhere within a first interval 111, the P_E -pointer within a second interval 112 and the P_L -pointer within a third interval 113. All the pointers are always set together, such that their relative distances remain unchanged. A limit value P_{L-min} for the P_L -pointer typically coincides with the first element of the modified code vector CV_m . Namely, outside this range a meaningful correlation cannot be performed. As a consequence of this and the fact that the pointers are set jointly P_P -, P_E - and P_L , a corresponding limit value P_{E-min} for the P_E -pointer is also defined.

Figure 12 illustrates how data words $d(1)$, $d(2)$, ..., $d(N)$ are formed from a sequence 1210 of incoming level-discrete sample values according to an embodiment of the invention. The data words $d(1)$, ..., $d(N)$ are formed such that each data word $d(k)$ contains a number of elements which is equal to the number of elements s_n in each carrier frequency-phase candidate vector. For instance, the length of these vectors may be 512 sample values

(as in the example described above with reference to the figures 5 and 6). Given that each sequence 1210 contains 5000 sample values, the number N of data words becomes 10 ($5000/512 \approx 9.76$ means that the last quarter of the tenth data word $d(10)$ is empty).

5 According to the invention, the elements in a current data word $d(k)$ are processed jointly (i.e. in parallel). Then, the processing of a subsequent data word $d(k+1)$ is initiated, and any processing parameters obtained during the processing of the current data word $d(k)$ that are required when processing the subsequent data word $d(k+1)$ are propagated as input data to the processing of the latter. These processing parameters preferably include: a pointer p_d which indicates a first sample value of the subsequent data word $d(k+1)$, a group of parameters which describe the relevant set of carrier frequency-phase candidate vectors $V_{f\phi}(f_{IF-C}, \phi_C)$ (i.e. 15 a carrier frequency candidate vector f_{IF-C} representing an in-phase version and a carrier frequency candidate vector f_{IF-C} representing a quadrature-phase version), the relevant set of code vectors CV_m , and prompt-, early-, and late pointers P_P , P_E , and P_L respectively.

20 Figure 13 illustrates how the data words of figure 12 are correlated with various pre-generated vectors according to an embodiment of the invention. First, a relevant set of carrier frequency-phase candidate vectors $V_{f\phi}(f_{IF-C}, \phi_C)$ is calculated for the data word $d(k)$. This set is normally obtained in a preceding acquisition phase (or, if the data word $d(k)$ is not the first word to be processed, during the processing of a previous word).

Thereafter, for each carrier frequency-phase candidate vector $V_{f\phi}(f_{IF-C}, \phi_C)$ in the relevant set, a pre-generated in-phase representation f_{IFI} and a quadrature-phase representation f_{IFQ} of the vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) respectively is acquired. Both these representations are found in the digital memory where the pre-generated carrier frequency-phase candidate vectors $V_{f\phi}(f_{IF-C}, \phi_C)$ are stored because they are merely one quarter period delays of one and the same vector, and the memory holds initial phase position representations for an entire period, see figure 6.

Then, in order to eliminate the influence of the carrier frequency component, the data word $d(k)$ is multiplied with the in-phase representation f_{IFI} of the carrier frequency-phase candidate vector $V_{f\phi}(f_{IF-C}, \phi_C)$ in the relevant set. As a result thereof, a first
 5 intermediate-frequency-reduced information word $S_{IF-I}(k)$ is produced. Correspondingly, the data word $d(k)$ is also multiplied with the quadrature-phase representation f_{IFQ} of the carrier frequency-phase candidate vector $V_{f\phi}(f_{IF-C}, \phi_C)$ in the relevant set, and a second intermediate-frequency-reduced information
 10 word $S_{IF-Q}(k)$ is produced.

Preferably, the multiplication between the data word $d(k)$ and the in-phase representation f_{IFI} respective the quadrature-phase representation f_{IFQ} of the carrier frequency-phase candidate vector $V_{f\phi}(f_{IF-C}, \phi_C)$ are performed by means of XOR- or SIMD-
 15 operations (i.e. 1-bit and multiple-bits multiplications respectively). This is namely possible if the data word $d(k)$ and the vector $V_{f\phi}(f_{IF-C}, \phi_C)$ have compatible data formats.

Subsequently, the first intermediate-frequency-reduced information word $S_{IF-I}(k)$ is multiplied with a modified code vector CV_{m-P} ,
 20 which has been retrieved from the digital memory where these pre-generated vectors are stored, and starts at a position indicated by the prompt pointer P_P . A first prompt-despread symbol string $\Lambda_{IP}(k)$ is produced as a result of this operation. The first intermediate-frequency-reduced information word
 25 $S_{IF-I}(k)$ is also multiplied with a modified code vector $CV_{m-E}(k)$, which starts at a position indicated by the early pointer P_E . A first early-despread symbol string $\Lambda_{IE}(k)$ is produced as a result of this operation. The first intermediate-frequency-reduced information word $S_{IF-I}(k)$ is likewise multiplied with a modified
 30 code vector $CV_{m-L}(k)$, which starts at a position indicated by the late pointer P_L , and a first late-despread symbol string $\Lambda_{IL}(k)$ is produced. Moreover, the second intermediate-frequency-reduced information word $S_{IF-Q}(k)$ is multiplied with a modified code vector $CV_{m-P}(k)$, which starts at a position indicated by the
 35 prompt pointer P_P , and a second prompt-despread symbol string

$\Lambda_{QP}(k)$ is produced. Correspondingly, the second intermediate-frequency-reduced information word $S_{IF-Q}(k)$ is multiplied with a modified code vector $CV_{m-E}(k)$, which starts at a position indicated by the early pointer P_E , and a second early-despread symbol string $\Lambda_{QE}(k)$ is produced. Likewise, the second intermediate-frequency-reduced information word $S_{IF-Q}(k)$ is multiplied with a modified code vector $CV_{m-L}(k)$, which starts at a position indicated by the late pointer P_L , and a second late-despread symbol string $\Lambda_{QL}(k)$ is produced.

After that, a resulting data word $D_{R-IE}(k)$, $D_{R-IP}(k)$, $D_{R-IL}(k)$, $D_{R-QE}(k)$, $D_{R-QP}(k)$ and $D_{R-QL}(k)$ may be derived from each of the despread symbol strings $\Lambda_{IP}(k)$, $\Lambda_{IE}(k)$, $\Lambda_{IL}(k)$, $\Lambda_{QP}(k)$, $\Lambda_{QE}(k)$ and $\Lambda_{QL}(k)$ respectively by adding the elements in the respective string together. If the strings represent un-packed data, the processor may simply perform the relevant adding operation to obtain the resulting data word $D_R(k)$. If however, the strings represent packed data, the resulting data word $D_R(k)$ is, according to a preferred embodiment of the invention, derived by looking up a pre-generated value in a table 1310 based on the bit pattern given by the respective despread symbol string $\Lambda_{IP}(k)$, $\Lambda_{IE}(k)$, $\Lambda_{IL}(k)$, $\Lambda_{QP}(k)$, $\Lambda_{QE}(k)$ and $\Lambda_{QL}(k)$.

According to a preferred embodiment of the invention, in addition to the individual data words $D_{R-IE}(k)$, $D_{R-IP}(k)$, $D_{R-IL}(k)$, $D_{R-QE}(k)$, $D_{R-QP}(k)$ and $D_{R-QL}(k)$, corresponding accumulated data words are produced, such that after having generated a data word $D_R(k)$, the sum of all data words $D_R(1)$ to $D_R(k)$ is also obtained. Hence, when the data word $d(N)$ has been processed, the resulting sum $D_R(1)$ to $D_R(N)$ is also at hand.

Moreover, the resulting data words represent payload information. For instance, based on the set of resulting data words $D_{R-IE}(k)$, $D_{R-IP}(k)$, $D_{R-IL}(k)$, $D_{R-QE}(k)$, $D_{R-QP}(k)$ and $D_{R-QL}(k)$ a demodulated piece of information of a transmitted data symbol sequence D as shown in figure 4 may be derived. In a steady state operation, basically only one of the resulting data words, say $D_{R-IP}(k)$,

actually carries the information.

- According to a preferred embodiment of the invention, the multiplications involved in the multiplications between the intermediate-frequency-reduced information words $S_{IF-I}(k)$ and $S_{IF-Q}(k)$ respectively and the modified code vectors $CV_{m-P}(k)$, $CV_{m-E}(k)$; $CV_{m-L}(k)$ are all performed by means of XOR- or SIMD-operations. This is possible if the intermediate frequency information words $S_{IF-I}(k)$; $S_{IF-Q}(k)$ and the modified code vectors $CV_{m-E}(k)$, $CV_{m-P}(k)$; $CV_{m-L}(k)$ have compatible data formats.
- 10 It was mentioned above with reference to figure 11 that more than one pair of early- and late pointers may be assigned to the prompt pointer in order to accomplish an improved tracking. Figure 14 illustrates how two pairs of such pointers P_{E1} ; P_{L1} and P_{E2} ; P_{L2} respectively are assigned around a prompt pointer P_P
- 15 according to an embodiment of the invention. The horizontal axis here represents a code shift CS and the vertical axis shows a normalised correlation factor. An optimal positioning of the prompt pointer P_P is thus equivalent to a normalised correlation value of 1. The more the sampled data is shifted in either
- 20 direction from this position, the lower the correlation value becomes down to substantially zero for a shift of one chip or more. The algorithm is perfectly balanced when (as illustrated in the figure) both the pointers P_{E1} and P_{L1} of a first pair produce a first shifted correlation result, both the pointers P_{E2} and P_{L2} of a
- 25 second pair produce a second shifted correlation result, the first shifted correlation result is larger than the second shifted correlation result and both the first and the second shifted correlation results are smaller than the correlation result obtained at the prompt position P_P . Said correlation results are preferably
- 30 generated according to a process corresponding to what has been described above with reference to figure 13. Based on the correlation results for the pointer positions P_P , P_{E1} , P_{L1} , P_{E2} and P_{L2} a (if necessary new) set of modified code vectors $CV_{m-E}(k)$, $CV_{m-P}(k)$; $CV_{m-L}(k)$ is selected, which is deemed to be optimal.

Figure 15 shows a signal receiver 1500 for receiving navigation data signals transmitted in a navigation satellite system according to an embodiment of the invention. The receiver 1500 includes radio front end unit 1510, an interface unit 1520 and a digital processor unit 1530.

The radio front end unit 1510 is adapted to receive a continuous radio signal S_{HF} , and in response thereto produce a corresponding electrical signal S_{IF} which has a comparatively high frequency. The interface unit 1520 is adapted to receive the electrical signal S_{IF} , and in response thereto, produce a sequence of sample values that represents the same information as the electrical signal S_{IF} and is divided into data words $d(k)$. The digital processor unit 1530 is adapted to receive the data words $d(k)$, and in response thereto, demodulate a data signal. The digital processor unit 1530, in turn, includes a memory means 1535, which is loaded with a computer program that is capable of controlling the steps of the proposed procedure when the program is run in the processor unit 1530.

In order to sum up, the general method of processing spread spectrum signals according to the invention will now be described with reference to a flow diagram in figure 16.

A preparation step 1600 pre-generates code vectors which each represents a signal source specific code sequence that is intended to be received (or at least possible to receive) and demodulated in the receiver. The step 1600 is performed before the signal reception is initiated.

A step 1610 then receives a continuous signal of a comparatively high frequency. A following step 1620 samples the continuous signal at a basic sampling rate, whereby a resulting sequence of time discrete signal samples is produced. Each sample is also quantised (either with a relatively low-resolution, such as with 1 bit per sample value, or with a relatively high resolution depending on the application and the number of data

bits per samples delivered from the radio front end unit 1510), such that a corresponding level-discrete sample value is obtained. Subsequently, a step 1630 forms data words from the sample values, where each data word includes one or more
5 consecutive sample values. After that, a step 1640 carries out correlation operations between the information in the data words and at least one of the pre-generated representations of a signal source specific code sequence. The correlation step involves correlating at least each vector in a sub-group of the code
10 vectors with at least one vector that has been derived from a data word. A following step 1650 produces data as a result of the correlation performed in step 1640. Then, a step 1660 investigates whether the sampled sequence has ended, i.e. whether there are any more data words to process. If more
15 sampled data to process is found, the procedure returns to the step 1640. Otherwise, the procedure loops back to the step 1610 again for continued reception of the incoming signal. Naturally, such signal is preferably also received during execution of the steps 1620 to 1660. The sequential procedure
20 illustrated in figure 16 is merely applicable to a specific received signal segment. Preferably, all the steps are actually 1610 to 1660 are actually performed in parallel.

The process steps, as well as any sub-sequence of steps, described with reference to the figure 16 above may be
25 controlled by means of a programmed computer apparatus, such as a microprocessor located in a GNSS-receiver. Moreover, although the embodiments of the invention described above with reference to the drawings comprise computer apparatus and processes performed in computer apparatus, the invention thus
30 also extends to computer programs, particularly computer programs on or in a carrier, adapted for putting the invention into practice. The program may be in the form of source code, object code, a code intermediate source and object code such as in partially compiled form, or in any other form suitable for
35 use in the implementation of the process according to the

- invention. The carrier may be any entity or device capable of carrying the program. For example, the carrier may comprise a storage medium, such as a ROM (Read Only Memory), for example a CD (Compact Disc) or a semiconductor ROM, or a magnetic recording medium, for example a floppy disc or hard disc. Further, the carrier may be a transmissible carrier such as an electrical or optical signal which may be conveyed via electrical or optical cable or by radio or by other means. When the program is embodied in a signal which may be conveyed directly by a cable or other device or means, the carrier may be constituted by such cable or device or means. Alternatively, the carrier may be an integrated circuit in which the program is embedded, the integrated circuit being adapted for performing, or for use in the performance of, the relevant processes.
- 15 The term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components. However, the term does not preclude the presence or addition of one or more additional features, integers, steps or components or groups thereof.
- 20 The invention is not restricted to the described embodiments in the figures, but may be varied freely within the scope of the claims.

Claims

1. A method of processing spread spectrum signals comprising:
receiving a continuous signal (S_{IF}) of a comparatively high
5 frequency,
sampling the continuous signal (S_{IF}) at a basic sampling rate (r_s), whereby a resulting sequence of time discrete signal samples ($S[s_i]$) is produced,
quantising each signal sample into a corresponding level-
10 discrete sample value,
forming of a plurality of data words ($d(1), \dots, d(N)$) which each includes one or more consecutive sample values (s_1, \dots, s_n), and
correlation between information in the data words ($d(k)$) and
15 at least one representation ($CS(i)$) of a signal source specific code sequence (CS), characterized by
the method comprising a preparation for the correlation step, wherein, before receiving the continuous signal (S_{IF}), a multitude of code vectors ($CV; CV_m$) are pre-generated, each code vector
20 representing a particular code sequence ($CS(i)$) of the at least one signal source specific code sequence (CS), and
the correlation step involving multiplying at least each vector in a sub-group ($CV_{m-E}, CV_{m-P}, CV_{m-L}$) of the code vectors ($CV; CV_m$) with at least one vector ($S_{IF-I}(k); S_{IF-Q}(k)$) derived from the
25 data word ($d(k)$).
2. A method according to claim 1, characterized by each code vector ($CV; CV_m$) representing a particular signal source specific code sequence ($CS(i)$) being sampled at the basic sampling rate (r_s) and quantised with the quantising process being
30 used to produce the level-discrete sample values (s_1, \dots, s_n).
3. A method according to any one of the preceding claims, characterized by the at least one signal source specific code sequence (CS) being pseudo random noise.

4. A method according to any one of the preceding claims, characterized by the receiving step involving down conversion of an incoming high-frequency signal (S_{HF}) to an intermediate frequency signal (S_{IF}), the high-frequency signal (S_{HF}) having a spectrum which is symmetric around a first frequency (f_{HF}) and the intermediate frequency signal (S_{IF}) having a spectrum which is symmetric around a second frequency (f_{IF}) being considerably lower than the first frequency (f_{HF}).
5. A method according to claim 4, characterized by the steps of: determining a maximum frequency variation (f_D) of the second frequency (f_{IF}) due to Doppler-effects, defining a Doppler frequency interval ($f_{IF-min} - f_{IF-max}$) around the second frequency (f_{IF}), the Doppler frequency interval ($f_{IF-min} - f_{IF-max}$) having a lowest frequency limit (f_{IF-min}) equal to the difference between the second frequency (f_{IF}) and the maximum frequency variation (f_D), and a highest frequency limit (f_{IF-max}) equal to the sum of the second frequency (f_{IF}) and the maximum frequency variation (f_D), dividing the Doppler frequency interval ($f_{IF-min} - f_{IF-max}$) into an integer number of equidistant (Δf) frequency steps (f_{IF-min} , $f_{IF-min} + \Delta f$, ..., f_{IF-max}), and defining a frequency candidate vector (f_{IF-C}) for each frequency step (f_{IF-min} , $f_{IF-min} + \Delta f$, ..., f_{IF-max}).
6. A method according to claim 5, characterized by the steps of: determining an integer number of initial phase positions ($\varphi_0, \dots, \varphi_7$) for the intermediate frequency signal (S_{IF}), and defining a carrier frequency-phase candidate vector ($V_{f\varphi}(f_{IF-C}, \varphi_C)$) for each combination of carrier frequency candidate vector (f_{IF-C}) and initial phase position ($\varphi_0, \dots, \varphi_7$).
7. A method according to claim 6, characterized by the steps of: determining the number of elements (s_n) in each carrier frequency-phase candidate vector ($V_{f\varphi}(f_{IF-C}, \varphi_C)$), and

storing the carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) according to a data format being adapted to performing correlation operations between the at least one vector ($S_{IF-I}(k); S_{IF-Q}(k)$) derived from the data word ($d(k)$) and a
 5 segment of a carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$).

8. A method according to claim 7, characterized by the adapting of the data format involving adding at least one element to each segment of the carrier frequency-phase candidate
 10 vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) such that the segment attains a number of elements which is equal to the number of elements in each the at least one vector ($S_{IF-I}(k); S_{IF-Q}(k)$) derived from the data word ($d(k)$), thus enabling a segment of the carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) and one of the at least one
 15 vector ($S_{IF-I}(k); S_{IF-Q}(k)$) to be processed jointly by at least one of a SIMD-operation and an XOR-operation.

9. A method according to any one of the preceding claims, characterized by the steps of:

determining a maximum variation a code rate due to
 20 Doppler-effects,

defining a Doppler rate interval ($CR_{C-min} - CR_{C-max}$) around a center code rate (CR_C), the Doppler frequency interval having a lowest code rate limit (CR_{C-min}) equal to the difference between the center code rate (CR_C) and the maximum code rate variation (CR_D), and a highest frequency limit (CR_{C-max}) equal to
 25 the sum of the center code rate (CR_C) and the maximum code rate variation (CR_D),

dividing the Doppler rate interval ($CR_{C-min} - CR_{C-max}$) into an integer number of equidistant (ΔCR) code rate steps (CR_{C-min} ,
 30 $CR_{C-min} + \Delta CR, \dots, CR_{C-max}$) and

defining a code rate candidate (CR_{C-C}) for each code rate step ($CR_{C-min}, CR_{C-min} + \Delta CR, \dots, CR_{C-max}$).

10. A method according to claim 9, characterized by determining an integer number of possible initial code phase positions (0.0, ..., 0.9) for each code rate candidate (CR_{C-C}).

5 11. A method according to claim 10, characterized by defining, for each signal source specific code sequence ($CS(i)$), a set of combinations between code rate candidate (CR_{C-C}) and code phase position (0.0, ..., 0.9), each combination representing a code rate-phase candidate vector.

10 12. A method according to claim 11, characterized by generating, for each signal source specific code sequence ($CS(i)$), a set of code vectors (CV) by:

sampling each code rate-phase candidate vector with the basic sampling rate (r_s) whereby a corresponding code vector (CV) is produced.

15 13. A method according to any one of the preceding claims, characterized by generating a modified code vector (CV_m) on basis of each code vector (CV) by:

20 copying a particular number of elements (E_a) from the end of an original code vector (CV) to the beginning of the modified code vector (CV_m), and

copying the particular number of elements (E_b) from the beginning of the original code vector (CV) to the end of the code vector (CV_m).

25 14. A method according to claim 13, characterized by storing, for each signal source specific code sequence ($CS(i)$), a set of modified code vectors ($\{CV_m(CR_{C-C}, Cph)\}$), where

each modified code vector (CV_m) contains a number of elements (s_1, \dots, s_m) representing a sampled version of at least one full code sequence (CS),

30 a particular modified code vector (CV_m) is defined for each combination of code rate candidate (CR_{C-C}) and code phase

position (Cph).

15. A method according to claim 14, characterized by adapting the data format of the modified code vectors (CV_m) with respect to the data format of the at least one vector ($S_{IF-I}(k)$; $S_{IF-Q}(k)$) derived from the data word ($d(k)$), such that a modified code vector (CV_m) and one of the at least one vector ($S_{IF-I}(k)$; $S_{IF-Q}(k)$) may be processed jointly by at least one of a SIMD-operation and an XOR-operation.
16. A method according to any one of the claims 14 or 15, characterized by involving an initial acquisition phase and a subsequent tracking phase, wherein during the acquisition phase a set of preliminary parameters are established which are required for initiating a decoding of signals received during the tracking phase, a successful acquisition phase resulting in at least one signal source specific code sequence (CS) being identified and a transmitted signal being rendered possible to track, each of the at least one signal source specific code sequence (CS) being associated with tracking characteristics in the form of:
 - a modified code vector (CV_m),
 - a carrier frequency candidate vector (f_{IF-C}),
 - an initial phase position (Φ_C),
 - a code phase position (Cph), and
 - a code index (CI) denoting a starting sample value for the modified code vector (CV_m).
17. A method according to claim 16, characterized by the tracking involving:
 - calculating, based the tracking characteristics, a prompt pointer (P_P) for each modified code vector (CV_m), the prompt pointer (P_P) indicating a code sequence start position, and an initial prompt pointer (P_P) being equal to the code index (CI), and
 - assigning, around each prompt pointer (P_P), at least one pair of early- and late pointers (P_E, P_L ; P_{E1}, P_{L1} P_{E2}, P_{L2}), where

the early pointer (P_E) specifies a sample value being positioned at least one element before the prompt pointer's (P_P) position, and the late pointer (P_L) specifies a sample value being positioned at least one element after the prompt pointer's (P_P) position.

18. A method according to claim 17, characterized by the tracking involving:
receiving a sequence of incoming level-discrete sample values (1210),

10. forming data words ($d(1), \dots, d(N)$) of the sample values (1210) such that each data word ($d(k)$) contains a number of elements which is equal to the number of elements (s_n) in each carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$),

15. calculating a relevant set of carrier frequency-phase candidate vectors ($V_{f\phi}(f_{IF-C}, \phi_C)$) for the data word ($d(k)$), and
acquiring, for each carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) in the relevant set, a pre-generated in-phase representation (f_{IFI}) and a quadrature-phase representation (f_{IFQ}) of the vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) respectively.

20. 19. A method according to claim 18, characterized by the tracking involving:

25. multiplying each data word ($d(k)$) with the in-phase representation (f_{IFI}) of the carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) in the relevant set to produce a first intermediate-frequency-reduced information word ($S_{IF-I}(k)$),

multiplying each data word ($d(k)$) with the quadrature-phase representation (f_{IFQ}) of the carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) in the relevant set to produce a second intermediate-frequency-reduced information word ($S_{IF-Q}(k)$).

30. 20. A method according to claim 19, characterized by the tracking involving:

multiplying the first intermediate-frequency-reduced infor-

mation word ($S_{IF-I}(k)$) with a modified code vector ($CV_{m-P}(k)$) starting at a position indicated by the prompt pointer (P_P) to produce a first prompt-despread symbol string ($\Lambda_{IP}(k)$),

5 multiplying the first intermediate-frequency-reduced information word ($S_{IF-I}(k)$) with a modified code vector ($CV_{m-E}(k)$) starting at a position indicated by an early pointer (P_E) to produce a first early-despread symbol string ($\Lambda_{IE}(k)$),

10 multiplying the first intermediate-frequency-reduced information word ($S_{IF-I}(k)$) with a modified code vector ($CV_{m-L}(k)$) starting at a position indicated by a late pointer (P_L) to produce a first late-despread symbol string ($\Lambda_{IL}(k)$),

15 multiplying the second intermediate-frequency-reduced information word ($S_{IF-Q}(k)$) with a modified code vector ($CV_{m-P}(k)$) starting at a position indicated by the prompt pointer (P_P) to produce a second prompt-despread symbol string ($\Lambda_{QP}(k)$),

20 multiplying the second intermediate-frequency-reduced information word ($S_{IF-Q}(k)$) with a modified code vector ($CV_{m-E}(k)$) starting at a position indicated by the early pointer (P_E) to produce a second early-despread symbol string ($\Lambda_{QE}(k)$), and

25 multiplying the second intermediate-frequency-reduced information word ($S_{IF-Q}(k)$) with a modified code vector ($CV_{m-L}(k)$) starting at a position indicated by the late pointer (P_L) to produce a second late-despread symbol string ($\Lambda_{QL}(k)$).

21. A method according to claim 20, characterized by the tracking involving deriving, for each despread symbol string, a resulting data word ($D_{R-IP}(k)$, $D_{R-IE}(k)$, $D_{R-IL}(k)$, $D_{R-QP}(k)$, $D_{R-QE}(k)$; $D_{R-QL}(k)$).

22. A method according to claim 21, characterized by deriving the resulting data words ($D_{R-IP}(k)$, $D_{R-IE}(k)$, $D_{R-IL}(k)$, $D_{R-QP}(k)$, $D_{R-QE}(k)$; $D_{R-QL}(k)$) by looking up a respective pre-generated value in a table (1310).

23. A method according to any one of the claims 19 - 22, characterized by performing the multiplication between the data word ($d(k)$) and the in-phase representation (f_{IF-I}) of the carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) respective
 5 between the data word ($d(k)$) and the a quadrature-phase representation (f_{IF-Q}) of the carrier frequency-phase candidate vector ($V_{f\phi}(f_{IF-C}, \phi_C)$) by means of at least one of a SIMD-operation and an XOR-operation
24. A method according to any one of the claims 19 - 23,
 10 characterized by performing the multiplication between the intermediate-frequency-reduced information words ($S_{IF-I}(k)$; $S_{IF-Q}(k)$) and the modified code vectors (CV_{m-P} , CV_{m-E} ; CV_{m-L}) by means of at least one of a SIMD-operation and an XOR-operation.
25. A method according to any one of the claims 19 - 24,
 15 characterized by propagating, in connection with completing the processing of a current data word ($d(k)$) and initiating the processing of a subsequent data word ($d(k+1)$):
 a pointer (p_d) indicating a first sample value of the subsequent data word ($d(k+1)$),
 20 a group of parameters describing the relevant set of carrier frequency-phase candidate vectors ($V_{f\phi}(f_{IF-C}, \phi_C)$),
 the relevant set of code vectors (CV_m), and
 prompt-, early-, and late pointers (P_P , P_E , P_L).
26. A computer program directly loadable into the internal
 25 memory of a computer, comprising software for controlling the steps of any of the claims 1 - 25 when said program is run on the computer.
27. A computer readable medium, having a program recorded thereon, where the program is to make a computer control the
 30 steps of any of the claims 1 - 25.

28. A signal receiver (1500) for receiving navigation data signals transmitted in a navigation satellite system comprising:

a radio front end unit (1510) adapted to receive a continuous radio signal (S_{HF}) and in response thereto produce a corresponding electrical signal (S_{IF}) comparatively high frequency.

an interface unit (1520) adapted to receive the electrical signal (S_{IF}) and in response thereto produce a sequence of sample values being divided into data words ($d(k)$), and

10 a digital processor unit (1530) adapted to receive the data words (d(k)) and in response thereto demodulate a data signal, and including a memory means (1535), characterized in that a computer program according to claim 26 is loaded into the memory means (1535).

15

The present invention relates to processing of spread spectrum signals, where a continuous signal of a comparatively high frequency is received (1610). This signal is sampled at a basic

(Fig. 16)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

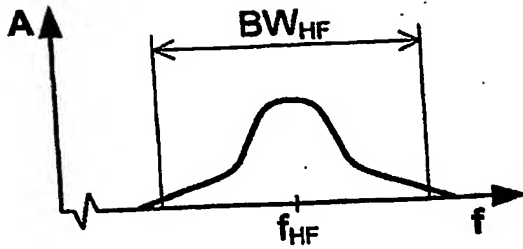


Fig. 1

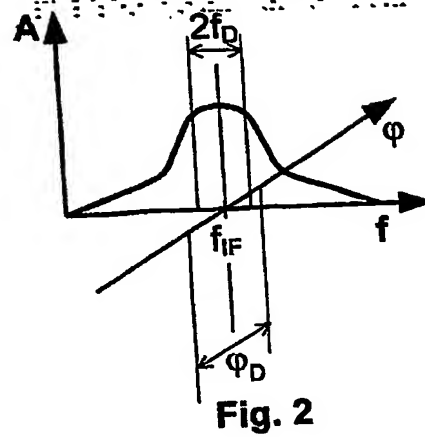


Fig. 2

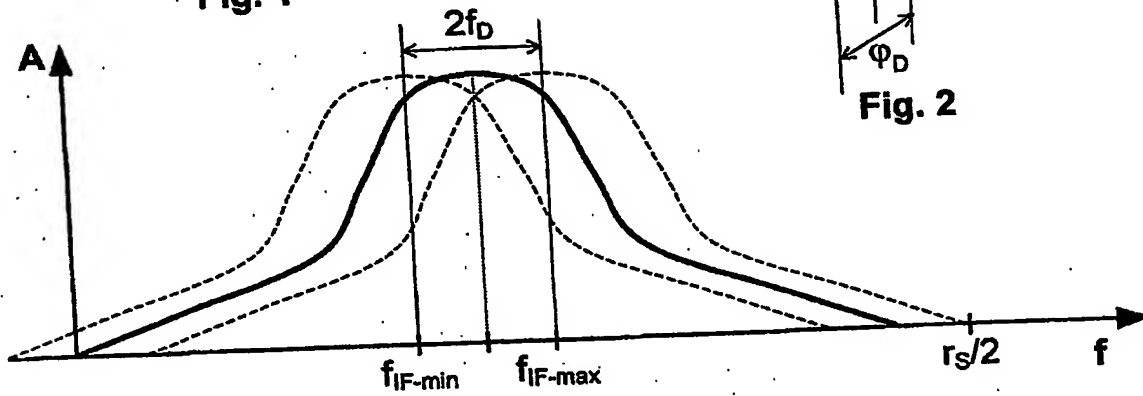


Fig. 3

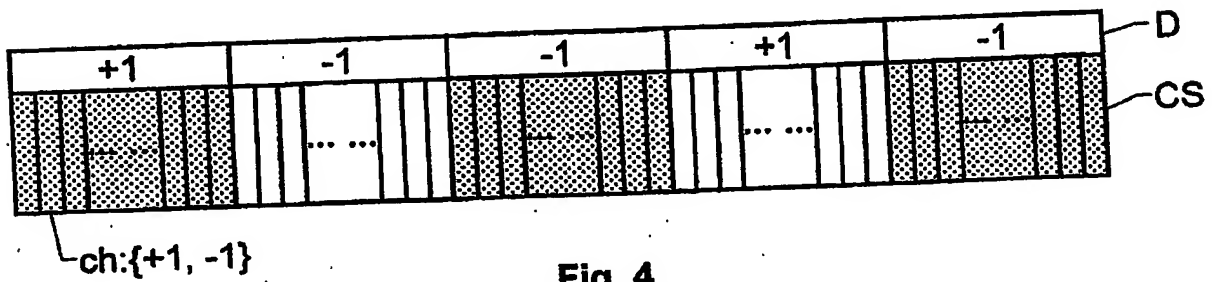


Fig. 4

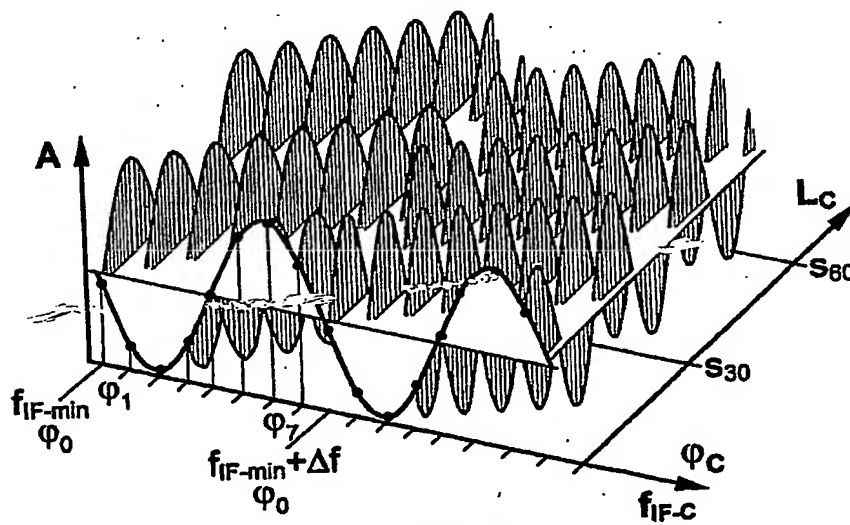


Fig. 5

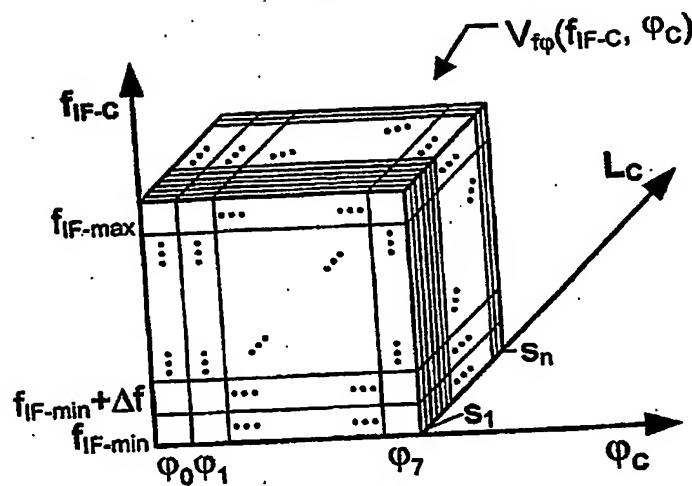


Fig. 6

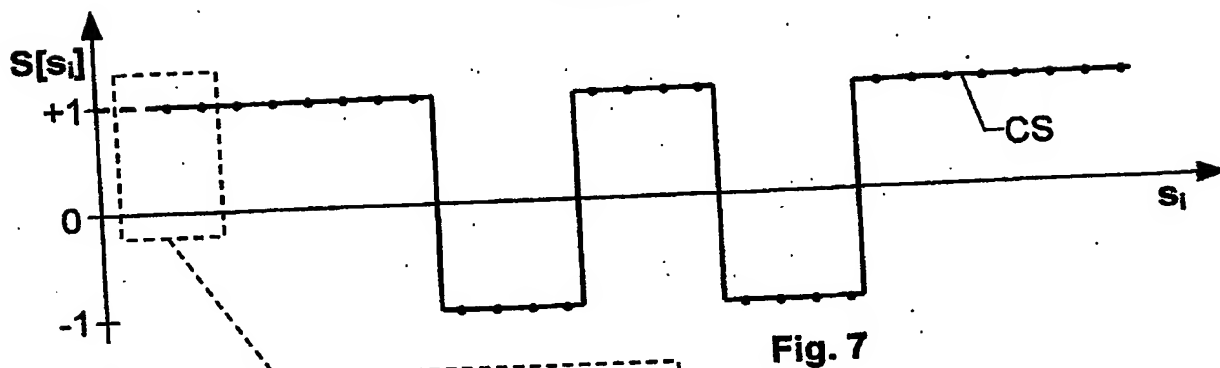


Fig. 7

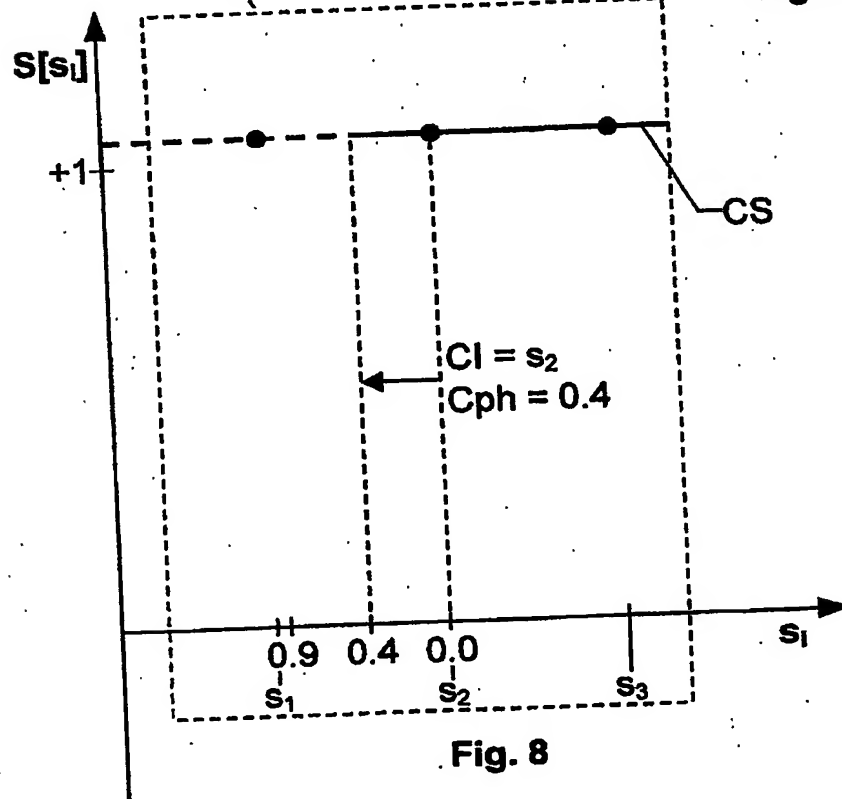
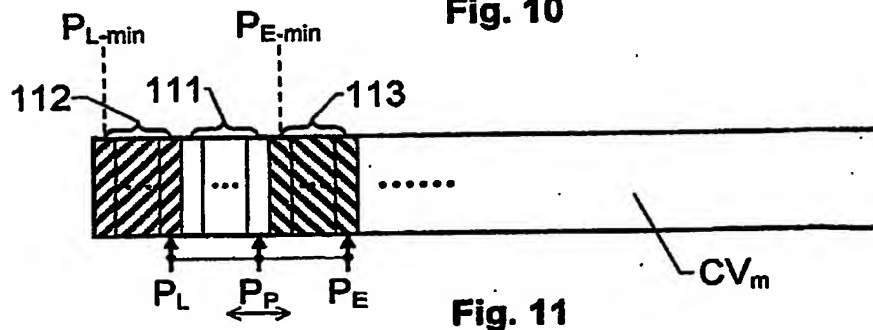
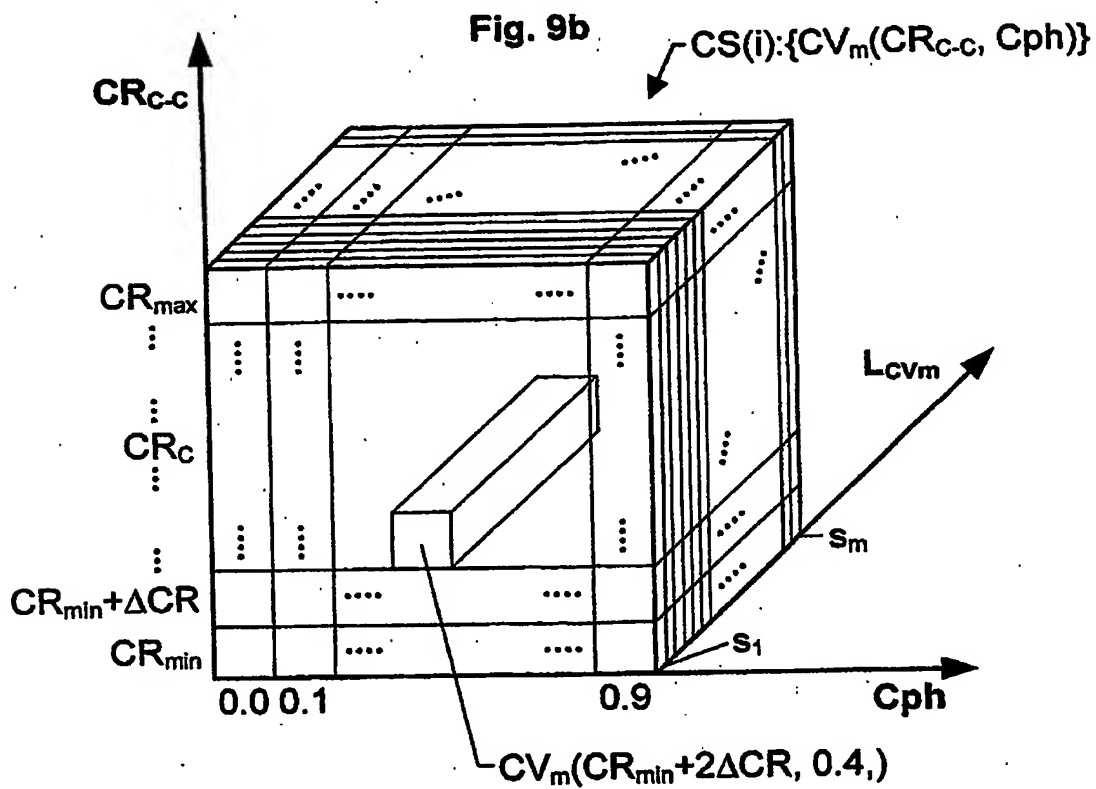
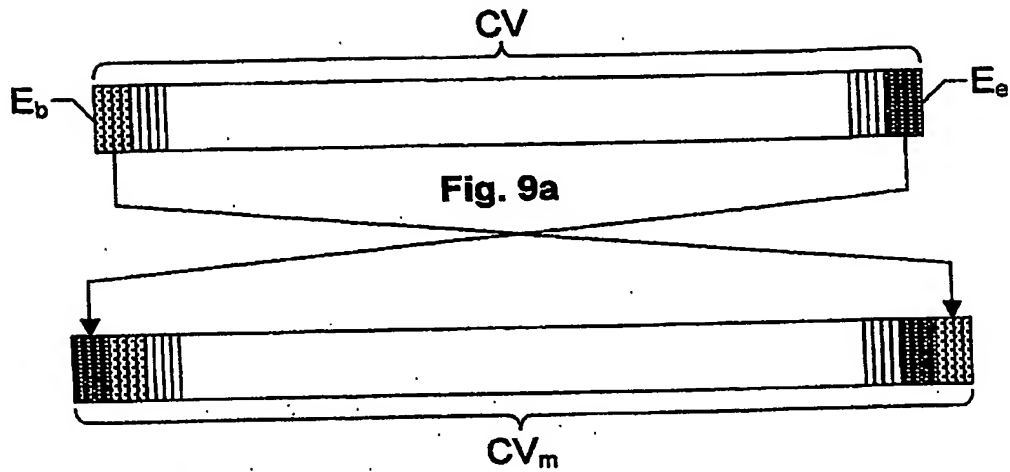


Fig. 8



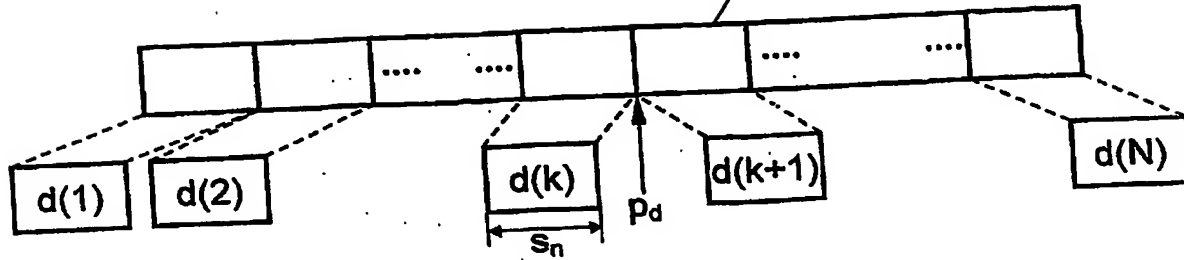


Fig. 12

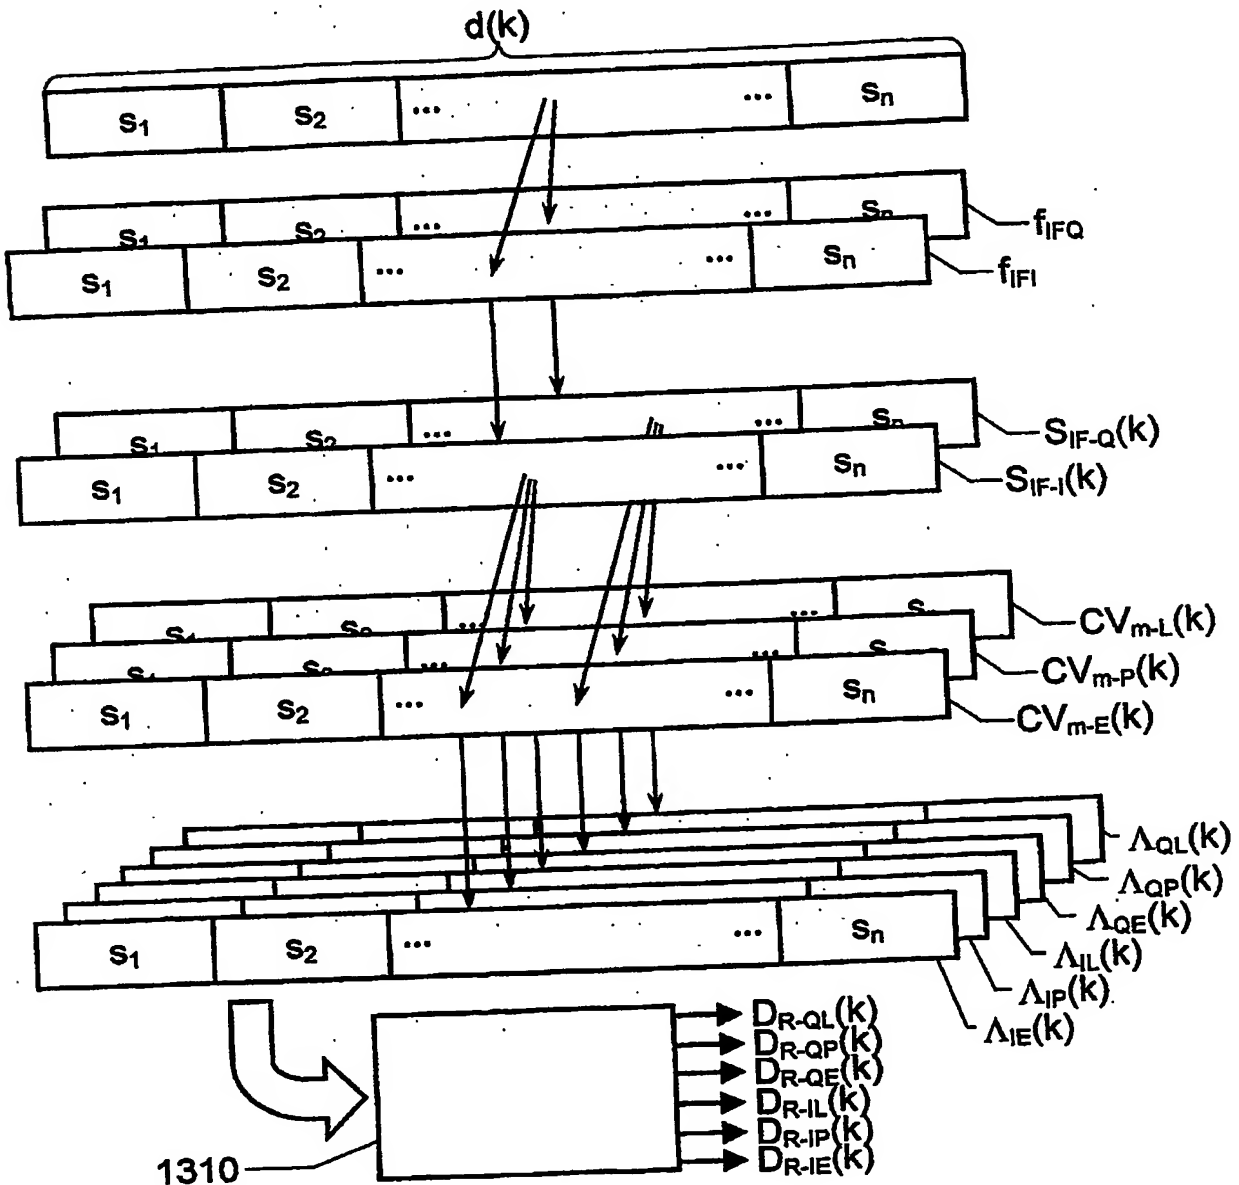


Fig. 13

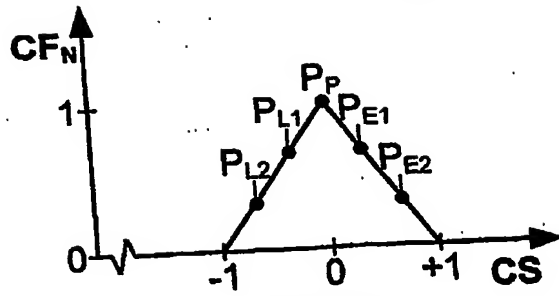


Fig. 14

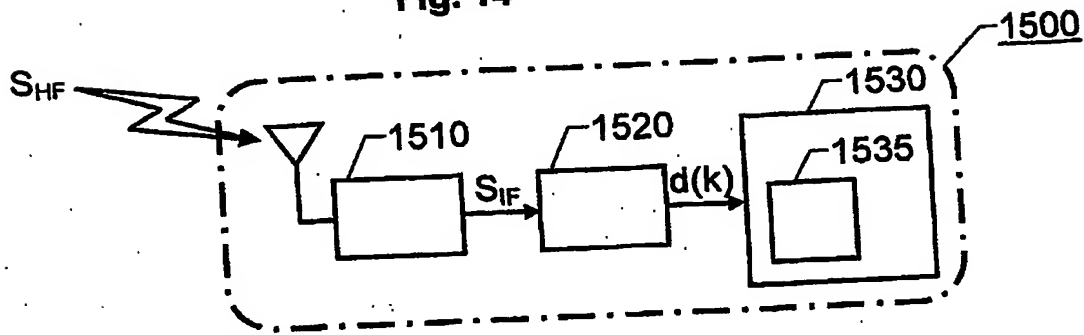


Fig. 15

